

Introducing the first of the ProBuilder[™] series of linear gas fireplaces from Fireplace Xtrordinair[®]. The ProBuilder[™] series of 42", 54", and 72" models, represents our entry level, moderately priced linear fireplaces available in either Standing Pilot Millivolt or GreenSmart[®] Basic 2 Electronic (GSB2) models.



ProBuilder™ 42 Linear Gas Fireplace



FEATURES YOU'RE GOING TO LOVE

- · Available in two models:
- Standing Pilot Millivolt (no electrical hookup required).
- GreenSmart® Basic 2 (GSB2).
- 42" W x 15" T tempered glass viewing area.
- · Glass barrier screen is flush to wall.
- Easy access gas controls.
- Sleek linear style with beautiful flame presentation.
- · Heavy gauge 16-18 steel construction.
- Can operate in a power outage.
- · Standard Wall Switch.

OPTIONS




- Optional wall mounted GreenSmart® Basic Remote
- · Optional dual 90 CFM Fans
- Multiple media options:
 Colored Glass/Stones and Twigs

SPECIFICATIONS

- · Heating Capacity*: Up to 1,250 Sq. Ft.
- Maximum BTU Input (NG/LP):
 25,000 Per Hour with 50% turndown.
- P4 Efficiency: 60.53% (NG) 61.43% (LP)
- AFUE: 67.1% (NG & LP).
- · Weight: 165 lbs. (75 kg).

*Heating capacity will vary with floor plan, Insulation, and outside temperature.

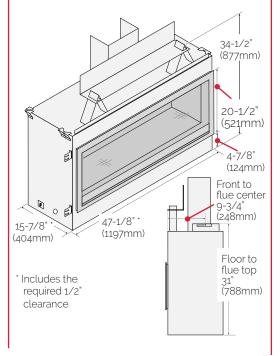


INSTALLATION


Clearances

(A) To Side of Fireplace 1/2" (13mm).

- (B) To Back of Fireplace 1/2" (13mm).
- (C) 0" clearance to combustible side facing or walls.



Minimum Framing



The fireplace enclosure must be a minimum 45-1/4" (1150mm) tall. Do not build into the fireplace enclosure.



Mukilteo, WA